

# RITUALS...

home & body cosmetics



Fusion between  
elegance and safety  
**Transpa Safe 6.0**



80%  
clear view




floor rolluiken

## Clear visibility

- 250x stronger than glass
- 80% maximum transparency
- theft/burglary retarding
- suitable for shop-fronts, shopping centres, front screens, counters, and/or facades
- can be used internally or externally



80%  
clear view

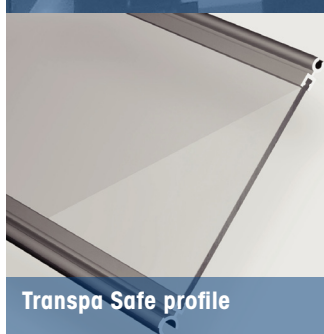

Transpa Safe profile

### Transpa Safe 6.0


The most optimal security, and also after closing time visibility in your shop window. The crystal clear polycarbonate gives your shop a permanent appearance. Transpa Safe is the perfect combination of security, style and functionality.

The 6 mm polycarbonate glass work is sealed in aluminium extruded profiles. These are worked into the complete width of the rolling shutter. The square roll-ups are designed so that friction between the polycarbonate and aluminium profiles does not occur.

### Transpa Safe 6.0

profiles/meter height	variable
profile width	21 mm
weight/m2	11,5 kg
max surface	25 m2
max width	7000 mm

Shutter height	Roll diameter*	
	axle 108	axle 159
1450	320	350
2100	350	400
3000	400	420
3700	420	450
4200	450	480

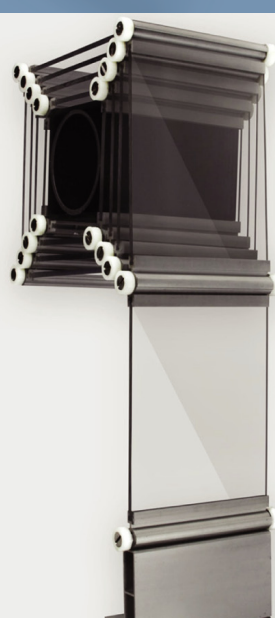

Square roll-up prevents damage to polycarbonate

### Curtain (shutter armour)

Transpa Safe is a vertical, square rolling system with a transparency of 80%. The system is built of aluminium, anodized, continuous couple hinges with polycarbonate of 6 mm, which is 250 times stronger than glass. Options:

- polycarbonate with super anti-scratch coating
- aluminium profiles powder coated in standard RAL colours.

### Endlocks

Durable steady synthetic to prevent horizontal movement and to guarantee a supple movement through the steel guide channel.

### Bottom rail

Finished with a double aluminium profile with a strengthened rib and lock rubber.

### Steel guide channel

U-profile guide channel of 3 mm galvanized steel, 80x52x80 mm; PVC strips. Option: powder coated in standard RAL colours.

### Construction

Steel construction of galvanized steel. Option: powder coated in standard RAL colours.

### Axle

Axle of steel, size 108/159 with adaption blocks, steel in red paint.

### Motor

Tubular motor; type depending on weight, 230/400V.

### Bearing

Safety brake; type depending on weight.

### Colours

All components of the roller shutters can be delivered in standard RAL colours.

### Operating

Delivered with turn button switch with automatic zero-point as standard. Option: various drive operations, i.e. key switch, remote control, card reader, biometric control.

### Personal protection (option)

Safety brake, photocell protection.

### Emergency operation (option)

Removable crank, emergency power supply.

### Quality

Floor Rolluiken designs, manufactures, assembles, and maintains all rolling shutters under direct management, and with a very high constant quality in accordance with regulations.

T 0346-21 34 26  
F 0346-21 34 38  
E info@floorrolluiken.nl  
I www.floorrolluiken.nl

Visitors address and showroom  
Groenekansweg 24  
3737 AG Groenekan  
Postbus 23, 3738 ZL Maartensdijk



floor rolluiken

- Total deliverer of all types of rolling shutter systems
- Own design, production, installation and maintenance
- Certified rolling shutters
- Approved by insurance companies
- 24/7 service

\* Sizes are indicative, no rights can be derived.